


SYMBOL	FUNCTION	OPER. FREQ	USED ON	REQ.
T401	IMC TANK	IMC	LFS-1	1
T404	IMC TANK	IMC	LFS-1	1
T646	IMC TANK	IMC	LFS-1	5

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	SEE CHART		10-21-63

TZ 164 0

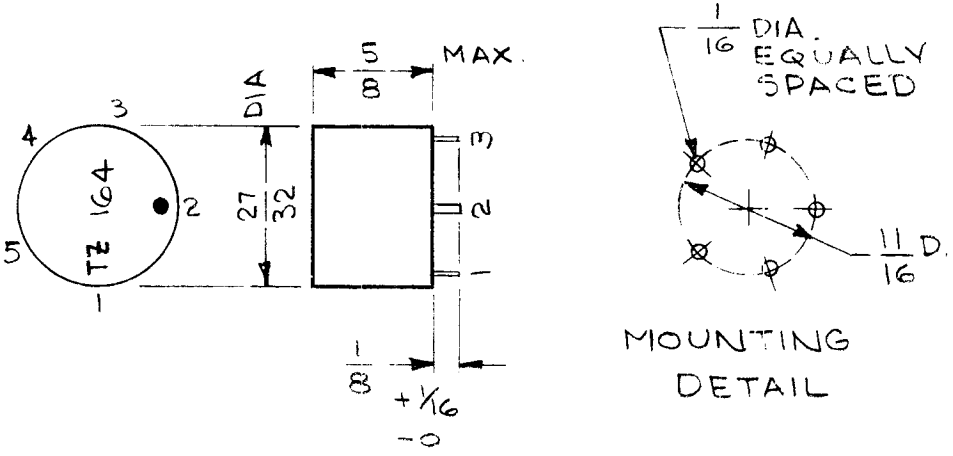

TRANSFORMER, R.F. FIXED

WINDING DATA:

WINDING NO. 1 (PRIMARY)
 NOM. IND. - 15.1 uh
 NO. OF TURNS - 13

WINDING NO. 2 (SECONDARY)
 NOM. IND. - 62 uh
 NO. OF TURNS - 26
 NO. OF TAPS - 1
 NO. OF TURNS TAPPED - 13

COIL FORM DATA:


MATERIAL - POWDERED IRON

CASE DATA:

MATERIAL - POTTED
 COLOR - ORANGE

TERMINAL DATA:

QUANTITY - 5
 TYPE - STAKED LUGS

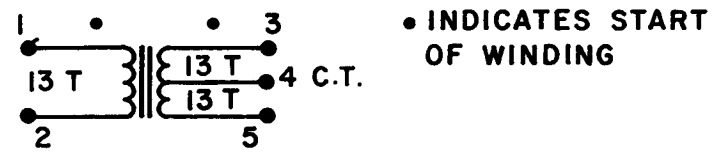

PRIMARY SECONDARY

— SCHEMATIC DIAGRAM —

REQ.	ITEM	PART NO.	M. GELLMAN	DESCRIPTION	SYMBOL						
		— N —		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK							
		SEE SPECS		TRANSFORMER, R.F. FIXED							
0	ORIGINAL RELEASE	7-27-64	G.D.L. @								
SYMBOL	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	NONE								
DECIMALS X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	A 2A 3447							
							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
											TZ 164 0
							FINISH & SPEC. NO.		ELC. DES. APP.	MECH. DES. APP.	